

DATA SHEET

# XtraTAP™ Portable Packet Broker

A compact network TAP with packet broker capabilities.



The XtraTAP™ Portable Packet Broker provides a range of network TAP (test access point) and network Packet Broker functionalities in a compact chassis for mid-size IT networks. It can be deployed at the main datacenter or at branch locations. Mirror network traffic and set filters to control traffic sent to connected network tools. Easily set-up, configure, and manage with a user-friendly GUI to ensure full visibility into the desired network data. Enjoy zero license or per port fees for the life of the product. The XtraTAP will not affect the performance of the network.

### POWERFUL

- 4 TAP modes
- Filters Layers 2, 3, and 4
- Dozens of use cases

### VERSATILE

- Four (4) SFP+ Ports
- Ports are 1G/10G
- Compatible with MSA compliant SFP+ transceivers

### COMPACT

- Portable Durable Metal Chassis
- Height 1.3" x Width 3.9" x Depth 9.43"
- Weighs 1.0 lb

### CERTIFICATIONS

- TAA compliant
- RoHS3
- SVHC
- Country of Origin: USA

## Ordering Information

Product Name	Part #	Product Description
XtraTAP™ Portable Packet Broker	P10GSFPBPFE	Garland Technology Portable XtraTAP 1/10G Filtering TAP: (4) SFP+ Ports, 2AC



### Have Questions?

sales@garlandtechnology.com | 716.242.8500 | GarlandTechnology.com

# Deployment Benefits

## Network TAP

- Passes all network traffic between connected devices.
- Sends 100% full duplex copies of network packets to monitoring tools with no dropped packets.
- Breakout Mode (or "TAP Mode") - send each side of traffic to separate monitoring ports.
- Aggregation Mode - merge both sides of the traffic streams into one monitoring port to create multiple copies of network data to support multiple devices from a single connectivity point.
- Regeneration/SPAN Mode - create multiple copies of network data to support multiple devices from a single connectivity point like a SPAN link.
- Bypass Mode - manage the availability of an inline tool any time without having to take down the network or impact business availability for maintenance or upgrades.
- Supports jumbo frames.

## Packet Broker


- Create rules to filter Layers 2, 3, 4 to analyze specific traffic.
- Set up to 500 filters.
- Set utilization alerts to avoid over-subscribing tools.
- Supports the use of SNMP for pulling performance data.

## Media Conversion


- Convert media from 1G to 10G and from 10G to 1G.

## Management


- Includes a management GUI that is effective and simple to use.
- Drop and drag interface to set-up filters.
- LED lights on front of XtraTAP indicate modes and functions.




TAP "Breakout" Mode




Aggregation Mode




Bypass Mode



3-1 Aggregation



Regeneration/SPAN Mode



Remote Management of Filtering and Aggregation Functions





## Have Questions?

sales@garlandtechnology.com | 716.242.8500 | GarlandTechnology.com

## HARDWARE KEY

1. 4x SFP+ 1G/10G Ports
2. Ethernet Port
3. Serial Port
4. Dual Power Supplies - 5V each

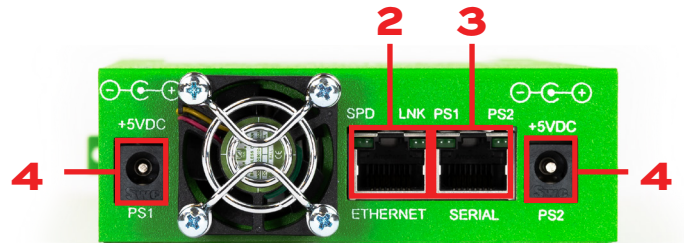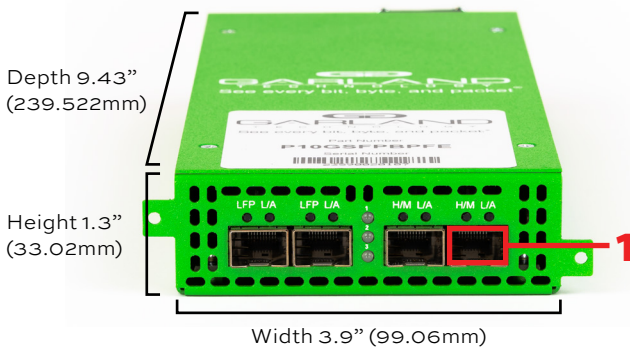

## SPECIFICATIONS

- Voltage: 5V DC +/-5% (redundant power supplies)
- Current: < 6 Amps
- Max. Consumption (Fiber SFP): < 15 Watts
- Max. Consumption (Copper SFP): < 22 Watts
- Ambient Temp.: 0°C to +40°C / +32°F to +104°F
- Operating Re. Humidity: 90% non-condensing
- Weight: 1.0 lbs (0.453592kg)

## PACKAGE CONTENTS

- One (1) P10GSFPBPFE
- Two (2) Power Cords
- Three (3) Screws (only 2 are needed to install; extra screw included)
- One (1) Serial Cable
- The Blade(s) ordered based on geography

## Warranty

Garland Technology's standard, manufacturer's warranty covers the first twelve months of product ownership. Extended Return to Factory (RTF) and Premium Technical Support (PTS) warranty plans are available for purchase for supplemental and/or additional coverage options in annual increments.

## Design-IT Demo

Have a complimentary technical discussion about your network, goals, challenges, and upcoming projects with a Garland Technology Engineer. After the meeting, you will receive a professionally-designed solution diagram you can use to consider options with your colleagues.

## Have Questions?

sales@garlandtechnology.com | 716.242.8500 | GarlandTechnology.com

## Accessories

Part #	Product Description
RMS-1U-V2	1U Rack Mount Kit - Hold up to 4 Portable TAPs
SFP+-10GBiDi-1270-1330	10GBASE-BX SFP+ 1270nm-TX/1330nm-RX 10km DOM Transceiver Module
SFP+-10GBiDi-1330-1270	10GBASE-BX SFP+ 1330nm-TX/ 1270nm-RX 10km DOM Transceiver Module
SFP+LR	SFP+ Dual Speed 1Gigabit-LX / 10Gigabit-LR Single Mode Fiber LC Connector
SFP+LR10G	SFP+ 10Gigabit-LR Single-Mode Fiber LC Connector
SFP+LRM10G	SFP+ 10Gigabit-LRM Multi-mode Fiber 1310nm Wavelength, up to 220m LC Connector
SFP+SR	SFP+ Dual Speed 1Gigabit-SX / 10Gigabit-SR Multi-Mode Fiber LC Connector
SFP+SR10G	SFP+ 10Gigabit-SR Multi-Mode Fiber LC Connector
SFP+T	SFP+ Triple Speed 100M/1G/10G Copper RJ45 Connector
SFP+ZR80	SFP+ 10Gigabit-ZR 80Km Single Mode Fiber LC Connector
SFP-1GBiDi-1310-1550	1000BASE-BX BiDi SFP 1310nm-TX/1550nm-RX 10km DOM Transceiver Module
SFP-1GBiDi-1550-1310	1000BASE-BX BiDi SFP 1550nm-TX/1310nm-RX 10km DOM Transceiver Module
SFPEX40km	SFP 1000Base-EX Single Mode Fiber 1310nm 40km LC Connector
SFPEX90km	SFP 1000Base-EX Single Mode Fiber 1550nm 90km LC Connector, -10/70°C operation
SFPFX	SFP 1310nm LED, 100BASE-FX, MM OC-1/OC-3, LC connector, 40/85°C operation, 2km
SFPLX	SFP 1000Base-LX Single Mode Fiber LC Connector
SFPLX-WB	Wide-band SFP 1000Base-LX Single Mode Fiber LC Connector
SFPSX	SFP 1000Base-SX Multi-Mode Fiber LC Connector
SFPTX	SFP 10/100/1000 Copper RJ-45 Connector
SFPTX1G	SFP 1 Gigabit-TX Copper RJ-45 Connector
SFPZX	SFP 1Gigabit-ZX Single Mode Fiber 1550nm Wavelength, 90KM, LC Connecto
TWINAX10M	Twinax Copper Direct Connect Cable SFP+ 10Gigabit 10 Meter
TWINAX1M	Twinax Copper Direct Connect Cable SFP+ 10Gigabit 1 Pre-Cut Meter
TWINAX3M	Twinax Copper Direct Connect Cable SFP+ 10Gigabit 3 Meter
TWINAX5M	Twinax Copper Direct Connect Cable SFP+ 10Gigabit 5 Meter



### Have Questions?

sales@garlandtechnology.com | 716.242.8500  
GarlandTechnology.com

Have a project and  
need Visio diagrams?

[\[Click\] Design-IT Demo](#)



See every bit, byte, and packet.®