
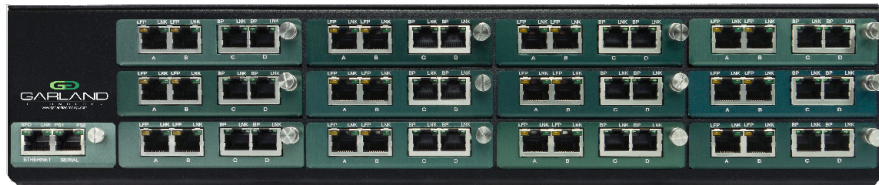


Copper Modular Network TAP

1G | 1U/2U | TAP 'Breakout' Mode

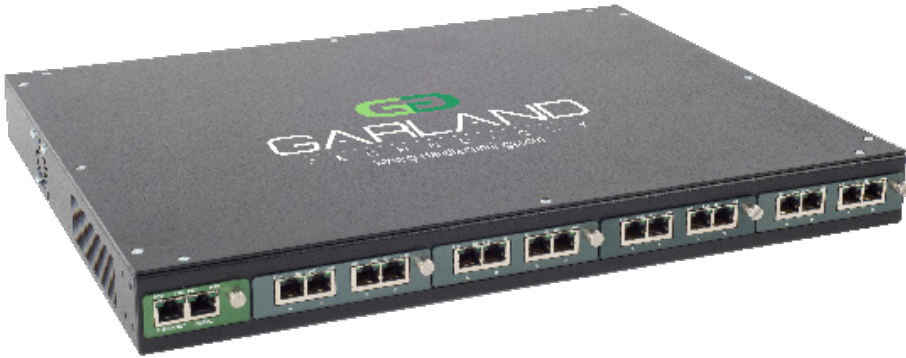

Network test access points (TAPs) are hardware tools that allow you to access and monitor your network. The modular chassis features a flexible and scalable design to meet your network needs today and tomorrow.

This Copper modular chassis supports tap 'breakout' mode, allowing you to fully deploy and manage your monitoring and security appliances and guarantee 100% network uptime letting you see every bit, byte and packet.®

Key Features

- **Scalable Modular TAPs System:**
 - 2U holds up to 12 TAPs
 - 1U holds up to 4 TAPs
- **Management and Non-Management options:**
 - Non-management chassis (management card can be added)
 - Management: CLI/GUI/SSH/HTTP/Telnet available
- Dual internal AC or DC power supplies
- TAP modules are hot swappable, fully configurable and interchangeable
- Accommodates GT legacy modular TAPs
- Network Failsafe recognizes power outages and automatically closes the relay circuitry in less than 8 milliseconds then reconnects the two network devices connected to Ports A & B.
- Supports jumbo frames and passes physical errors.
- Packet slicing and packet injection (aggregate mode for copper network port TAPs).
- 100% secure and invisible; no IP address, no MAC address; cannot be hacked
- Made, tested and certified in USA

APPLICATIONS:

- High density data center design.
- Network efficiency
- Media Conversion for 1G networks

SOLUTIONS:

Media Conversion

Converting media allows you to use monitoring tools that you already have or use monitoring tools that cost less.

- Fiber (SX, LX, ZX) to copper (TX)
- Copper (TX) to fiber (SX, LX, ZX)
- Short range fiber (SX) to long range fiber (LX or ZX).

Competitive Edge

- Flexible design - accommodates any 1G network scenario
- Scalable design - add modules as needed



Have Questions?

sales@garlandtechnology.com
+716.242.8500
garlandtechnology.com

Copper Modular Network TAP

1G | 1U/2U | TAP 'Breakout' Mode

Chassis options						
Model #	Chassis/TAPs*	Power Supplies	Voltage	Current (nominal)	Consumption (maximum)	Dimensions (WxHxD)
M1G1ACE	1U; up to 4 TAPs	Dual Internal AC	100-240VAC	0.75A@115VAC	86.25 Watts	17.40" x 1.75" x 13.45" (441.96mm x 44.45mm x 341.63mm)
M1G1DCE	1U; up to 4 TAPs	Dual Internal DC	36-60VDC	1A@48VDC	48 Watts	
M1G2ACE	2U; up to 12 TAPs	Dual Internal AC	100-240VAC	1A@115VAC	115 Watts	17.40" x 3.47" x 13.45" (441.96mm x 88.14mm x 341.63mm)
M1G2DCE	2U; up to 12 TAPs	Dual Internal DC	36-60VDC	2.8A@48VDC	134.4 Watts	
M1GC*	Management card: Ethernet/GUI - and - Serial/CLI for M1GxxxE					

*Blanking plates (Model #: Tray-BG) are used if management card is not required or if not all TAP modules are populated. Management card and additional GT TAP modules can be added to chassis.

Breakout TAP options									
Model #	Network Speed	Media		Modes					Features
		Network	Monitor	Breakout	Aggregation	Regeneration/SPAN	Filtering	Bypass	
M100CCB*	10/100M	2 Copper-RJ45, passive	2 Copper-RJ45	Yes	No	No	No	No	Passive
M1GCCB*	10/100/1000M	2 Copper-RJ45	2 Copper-RJ45	Yes	No	No	No	No	Link Synch with Fail Safe

*Supports Power over Ethernet (POE)



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2019 Garland Technology LLC. All Rights Reserved